

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)


PCT

(10) International Publication Number
WO 03/030695 A1

- (51) International Patent Classification⁷: **A47G 19/22**
- (21) International Application Number: **PCT/US02/31875**
- (22) International Filing Date: **4 October 2002 (04.10.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/971,499 **5 October 2001 (05.10.2001)** **US**
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US **09/971,499 (CIP)**
Filed on **5 October 2001 (05.10.2001)**
- (71) Applicant (for all designated States except US): **THE FIRST YEARS INC.** [US/US]; One Kiddie Drive, Avon, MA 02322-1171 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **CONNORS, James, A., Jr.** [US/US]; 3 Pierce Lane, Upton, MA 01568 (US). **MEDEIROS, David, E.** [US/US]; 100 Pleasant Street, Plainville, MA 02762 (US). **DYS, George, S.** [US/US]; 664 Cooper Hill Road, Mapleville, RI 02839 (US). **BRITTO, James, J.** [US/US]; 8 Pond Drive, Westport, MA 02790 (US). **HESSION, John, A.** [US/US]; 7 Drinkwater Ave., Braintree, MA 02184 (US).
- (74) Agent: **BABINEAU, James, W.**; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU;**

[Continued on next page]

(54) Title: **DRINKING CONTAINER**

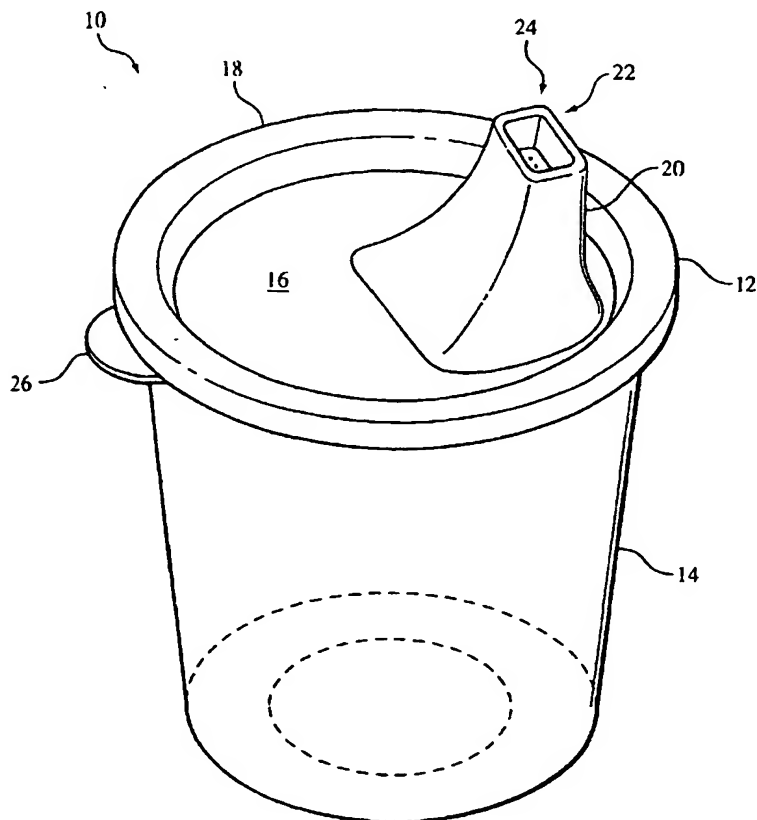

(57) Abstract: A disposable child's drinking cup (10) has a lid (12) with a drinking spout (20) defining multiple open holes (34) sized to resist leakage in the absence of suction, such as by the development of surface tension at the holes, and to allow flow when suction is applied. The holes are preferably formed during molding of the lid.

WO 03/030695 A1



CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DRINKING CONTAINER

TECHNICAL FIELD

This invention relates to drinking containers, and more particularly to spill-resistant drinking containers for children, such as those commonly known as “sippy cups.”

BACKGROUND

Children’s drinking cups are generally provided with removable lids, to help prevent large spills. Commonly, these lids have drinking spouts extending from their upper surface, that children place in their mouths to sip from the cups. Such cups are sometimes called “sippy cups.” Some sippy cup spouts have open slots or holes through which the liquid in the cup flows when the cup is inverted. Such slots or holes are generally sized for an acceptably high flow rate, for ease of cleaning, and to enable the passage of small drink particulates such as pulp in orange juice. Many parents understandably prefer sippy cups with valves that close off any flow opening in the spout until suction is supplied by the child, instead of permanently open holes or slots. The design of such valves traditionally entails a trade-off between flow rate during drinking and leak rate when not in use. Also, many such valves can be difficult to properly clean. Some valves are removable and can be misplaced. Some sippy cup valves are in the form of a flexible membrane with a normally closed slit which opens sufficiently under pressure to enable acceptable flow.

SUMMARY

We have realized that a drinking spout, such as that of a sippy cup lid, can provide an acceptably high flow rate and an acceptably low leak rate when equipped with a plurality of normally open holes of a particularly small size.

Several aspects of the invention feature a drinking container that includes a main body defining an interior cavity accessible through an opening at an upper end of the main body, and a removable lid secured to the main body at its upper end to

cover the opening and enclose, together with the main body, the interior cavity to hold a liquid.

According to one aspect of the invention, the lid has an extended drinking spout defining multiple unrestricted holes providing open hydraulic communication between exterior surfaces of the container and the interior cavity. The holes have a size selected to permit less than 3 drops of leakage of fresh water from the interior cavity through the holes over a 10 second interval under quasi-static conditions with the container inverted, a static head of 2.0 inches (51 millimeters) of fresh water at the inner ends of the holes, and no vacuum applied to the spout; and to dispense an aggregate of at least 1.3 gram of fresh water from the spout over a 10 second interval with a static vacuum of 0.27 Bar below atmospheric pressure applied at the outer ends of the holes and a static head of 2.0 inches (51 millimeters) of fresh water at the inner ends of the holes, with the container inverted.

In some embodiments, the holes are defined through a membrane having a nominal thickness of between about 0.010 and 0.040 inch (0.25 and 1.0 millimeter), preferably between about 0.015 and 0.030 inch (0.4 and 0.8 millimeter), at the holes.

Preferably, the membrane comprises a semi-rigid material, and more preferably consists of a semi-rigid material. By "semi-rigid", we mean a material that is not rubber-like or elastomeric, that is not elastic or resilient in use, as opposed, for example, to materials typically employed to form baby bottle nipples and the like. Molded polypropylene is a presently preferred semi-rigid material.

The membrane is preferably dimensionally stable, and in some cases is generally planar and perpendicular to a longitudinal axis of each hole.

In some preferred embodiments, the membrane is recessed within the drinking spout, such as a distance of at least 0.25 inch (6.4 millimeters). In some configurations, the membrane, is advantageously integrally and unitarily molded from a resin, preferably with a nominal molded thickness of less than about 0.035 inch (0.90 millimeter), more preferably with a nominal molded thickness of between about 0.020 and 0.026 inch (0.51 and 0.66 millimeter).

In some cases the lid forms an air-tight seal around its rim with the main body, at the upper end of the main body. In some other cases, only a liquid-tight seal is provided, allowing some air venting between the lid and body.

In some embodiments, the lid has a main body portion defining a peripheral groove sized to receive an upper rim of the cup. The lid may also have a snap ridge extending into the groove, or below the groove, at an outer edge thereof and positioned to snap under a rim of the cup when the cup and lid are fully engaged. In some cases, the snap ridge is discontinuous about a periphery of the lid.

Preferably, the holes each have a major lateral extent, perpendicular to a flow path along the hole, of less than about 0.025 inch (0.64 millimeter). More preferably, the major lateral extent of the holes is less than about 0.020 inch (0.51 millimeter), and even more preferably less than about 0.014 inch (0.36 millimeter). By "major lateral extent", we mean a greatest dimension measured transverse to flow, at a hole cross-section of minimum flow area. For a straight, cylindrical hole, for example, this would be the diameter of the hole.

Some spouts define at least four such holes, with each hole having a diameter of less than about 0.012 inch (0.30 millimeter), and some spouts define at least eight such holes.

In some particularly preferred embodiments, the holes are defined by molded surfaces of the drinking spout.

Some embodiments have holes that are flared at their inner ends. Some holes are defined through a membrane having a nominal thickness and forming a protruding lip about each hole, such that the holes each have a length greater than the nominal thickness of the membrane. In some cases such a lip extends toward the interior cavity. In some other cases, the lip extends away from the interior cavity. The lip tapers to a distal edge in some instances.

In some preferred embodiments, and particularly advantageous for disposability, both the main body and the lid are each formed of molded resin of a nominal wall thickness of less than about 0.035 inch (0.89 millimeter), preferably less than about 0.025 inch (0.64 millimeter). With this low nominal wall thickness, the bottom of the main body may have a slightly increased wall thickness, such as up to about 0.040 inch (1.0 millimeter) for increased impact resistance. For improved disposability, some versions of the drinking containers preferably have an empty weight less than about 30 grams, more preferably less than about 20 grams.

Some lids are formed of a resin containing polypropylene.

To enhance the development of surface tension at the holes, lid material defining the holes preferably has a natural state surface energy of less than about 35 dynes per centimeter.

According to another aspect of the invention, a drinking container has a main body defining an interior cavity accessible through an opening at an upper end of the main body, and a removable lid secured to the main body at its upper end to cover the opening and enclose, together with the main body, the interior cavity to hold a liquid. The lid has an extended drinking spout sized to be received within a human mouth and defining multiple unrestricted holes providing open hydraulic communication between exterior surfaces of the container and the interior cavity, for dispensing liquid disposed proximate inner ends of the holes in response to a vacuum applied at outer ends of the holes. The holes each have a major lateral extent, perpendicular to a flow path along the hole, of less than about 0.025 inch (0.64 millimeter), and together form an aggregate flow path through the spout of an area of at least 0.35 square millimeter.

The holes are preferably of a size selected to cause fresh water in the interior cavity to form a stable meniscus at the holes under a static pressure head of 2.0 inches (51 millimeters) of fresh water, with the container inverted and atmospheric pressure applied to the outer ends of the holes.

Preferably, the holes form an aggregate flow path through the spout of an area of at least 0.42 square millimeter, even more preferably an area of at least 0.50 square millimeter.

In some preferred embodiments, the holes are defined through a dimensionally stable, semi-rigid membrane having a nominal thickness of between about 0.010 and 0.040 inch (0.25 and 1.0 millimeter) at the holes. In some cases, the membrane is generally planar and perpendicular to a longitudinal axis of each hole, and recessed within the drinking spout.

The lid, including the membrane, is in some instances integrally and unitarily molded from a resin, such as polypropylene. Preferably, the lid has a nominal molded thickness of less than about 0.035 inch (0.90 millimeter).

In some embodiments, the lid forms an air-tight seal with the main body at the upper end of the main body.

Preferably, the major lateral extent of the holes is less than about 0.020 inch (0.51 millimeter), and more preferably less than about 0.014 inch (0.36 millimeter).

Some drinking spouts define at least four such holes, and some at least eight such holes.

5 The holes are preferably defined by molded surfaces of the drinking spout, such as surfaces formed as the lid is molded.

Various holes are configured as described above with respect to embodiments of the first aspect of the invention.

10 In some cases, both the main body and the lid are each formed of molded resin of a nominal thickness of less than about 0.035 inch (0.89 millimeter), and the two together have an empty weight less than about 30 grams, preferably less than about 20 grams.

Preferably, the lid material defining the holes has a natural state surface energy of less than about 35 dynes per centimeter.

15 In some embodiments, the spout forms an inwardly-extending dam wall about the holes. The spout may also have a distal rim defining an interior trough for receiving fluid as the container is inverted.

Some examples include a baffle plate disposed between the interior cavity and the lid, for inhibiting high flow rates into the spout.

20 In some instances, the lid has a resiliently deformable region adapted to be displaced outward under pressure from container contents when the container is inverted to increase container volume, thereby reducing pressure within the interior cavity. The deformable region may extend about the spout, and/or may comprise flexible undulations that may be molded. In some cases the resiliently deformable
25 region is of an elastomeric material molded over an aperture of the lid.

In some illustrated examples, the main body defines indentations in side surfaces thereof, for enhanced graspability.

30 According to yet another aspect of the invention, a lid is provided for a drinking container for children. The lid has a main body portion defining a peripheral groove sized to receive an upper rim of a cup to enclose a cavity for holding a liquid, and a drinking spout extending from the main body portion toward an outer side of the body portion. The spout defines multiple unrestricted holes providing open

hydraulic communication between opposite sides of the lid, for dispensing liquid disposed proximate inner ends of the holes in response to a vacuum applied at outer ends of the holes. The holes each have a major lateral extent, perpendicular to a flow path along the hole, of less than about 0.025 inch (0.64 millimeter), and together form
5 an aggregate flow path through the spout of an area of at least 0.35 square millimeter.

Preferably, the holes are of a size selected to cause fresh water at the inner ends of the holes to form a stable meniscus at the holes under a static pressure head of 2.0 inches (51 millimeters) of fresh water, with the lid inverted such that the spout extends downward and atmospheric pressure applied to the outer ends of the holes.

10 In some preferred embodiments, the holes are defined through a membrane having a nominal thickness of between about 0.010 and 0.040 inch (0.25 and 1.0 millimeter) at the holes.

As discussed above, the membrane preferably comprises a semi-rigid material.

In some cases, the holes are defined through a dimensionally stable membrane
15 within the drinking spout, with the membrane preferably recessed at least 0.25 inch (6.5 millimeters) within the drinking spout, as measured from a distal end of the spout. In some instances, the membrane is generally planar and perpendicular to a longitudinal axis of each hole, and the lid, including the membrane, is integrally and unitarily molded from a resin such as polypropylene.

20 In some embodiments, the lid has a nominal molded thickness of less than about 0.035 inch (0.90 millimeter), preferably between about 0.020 and 0.026 inch (0.51 and 0.66 millimeter).

Some preferred lids have a solid surface across their extent, save for the drinking holes.

25 Preferably, the holes each have a major lateral extent, perpendicular to a flow path along the hole, of less than about 0.020 inch (0.51 millimeter), and more preferably less than about 0.014 inch (0.36 millimeter).

In some cases the drinking spout defines exactly three such holes, with each hole having a minimum diameter of between about 0.010 and 0.025 inch (0.25 and
30 0.64 millimeter), in some cases about 0.015 inch (0.38 millimeter). In some other cases, the drinking spout defines at least four such holes, with each hole having a

diameter of less than about 0.020 inch (0.51 millimeter). In some configurations the drinking spout defines at least eight such holes.

Preferably, the holes are defined by molded surfaces of the drinking spout, and various holes are configured as described above with respect to embodiments of the first aspect of the invention.

In some embodiments the holes are of frusto-conical shape, with a larger end of each hole directed toward an inner side of the lid.

The lid, in some constructions, is formed of a resin containing polypropylene.

Preferably, the lid material defining the holes has a natural state surface energy of less than about 35 dynes per centimeter.

Another aspect of the invention features a drinking container with an improved sealing connection between lid and body. The container includes a main body defining an interior cavity accessible through an opening at an upper end of the main body, the body having a rim about its opening, the rim having a domed upper surface. A removable lid is secured to the main body at its upper end to cover the opening and enclose, together with the main body, the interior cavity to hold a liquid. The lid defines a groove about its edge sized to receive and snap over the rim of the main body and form a seal. The lid also has an extended drinking spout sized to be received within a human mouth and defining at least one unrestricted hole providing open hydraulic communication between exterior surfaces of the container and the interior cavity, for dispensing liquid disposed proximate an inner end of the hole in response to a vacuum applied at an outer end of the hole.

Particularly, the groove about the lid has an inner surface, and the rim of the main body has an outer surface, that each define semi-circular arcs of similar radii and have interlocking features on an inboard side. The interlocking features include a first lip projecting radially outward from the lid into the groove and a second lip projecting radially inward from the outer surface of the rim of the main body to produce a nominal radial interference between the first and second lips as the lid and main body are engaged.

In a particularly preferred embodiment, the first lip protrudes about 0.008 inch (0.2 millimeter) laterally into the groove from a vertical tangent to an inner edge of an upper, inner surface of the groove and the second lip protrudes about 0.008 inch (0.2

millimeter) toward a centerline of the main body from a vertical tangent to an inner edge of the outer surface of the rim.

The nominal radial interference between the first and second lips is preferably about 0.016 inch (0.4 millimeter).

5 In some cases, the lid also has at least one snap ridge extending downwardly and inwardly from an outer edge of the groove and positioned to snap below a lower, distal edge of the cup rim when the cup and lid are fully engaged.

In some configurations the lid includes a bending tab (26) extending radially outward near one of the snap ridges.

10 According to another aspect of the invention, a method of forming a lid for a drinking container is provided. The method includes injecting moldable resin into a closed die cavity defining a body cavity portion shaped to mold a body portion with a peripheral groove sized to receive an upper rim of a drinking container and, contiguous with the body cavity portion, a spout cavity portion shaped to mold a
15 drinking spout sized to be received within a human mouth, with pins extending across the body cavity portion, the pins each having a diameter of less than about 0.025 inch (0.64 millimeter). The injected resin is solidified to form a lid shaped by the die cavity, the lid having a drinking spout with molded surfaces defining holes corresponding to the pins. The die cavity is opened, and the lid is removed from the
20 cavity.

In some instances, the resin comprises polypropylene.

Preferably, the resin has a natural state surface energy of less than about 35 dynes per centimeter.

In some preferred embodiments, each pin has a diameter of less than about
25 0.020 inch (0.51 millimeter), for molding particularly small drinking holes.

In some cases, the die cavity has a series of at least three pins extending therethrough, for forming a corresponding number of holes in the lid.

In some embodiments, the die cavity is unobstructed across its extent in all directions, save for the pins.

30 According to yet another aspect, a method of preventing spills from drinking containers for children is provided. The method includes filling a cup with a

consumable liquid, and securing a lid as described above across an upper end of the cup.

Without intending to be limiting, we theorize that such small holes each sufficiently resist leakage because they are small enough to enable a meniscus of fluid to develop across the holes that holds back the static weight of the liquid in the cup due to surface tension in the meniscus until suction is applied to the spout. Once suction is applied by a drinking child, the surface tension is overcome and the liquid flows more readily through the hole. The number of holes is chosen to provide sufficient total flow rate for drinking.

Such small drinking holes may limit the utility of such sippy cup lids with respect to particularly viscous drinks or juices with significant pulp content. However, these small holes can be particularly inexpensive to produce, and can even be formed during lid molding without secondary operations. Provided through a particularly thin, semi-rigid wall of the spout, for example, these small holes can be readily cleaned by automatic dishwashing methods. Alternatively, lids with such holes can be produced with such economy as to make the lid practically disposable, as a single use item, eliminating the need for cleanability.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

Fig. 1 is a perspective view of a disposable sippy cup.

Fig. 2 is a top view of the lid of the sippy cup.

Fig. 3 is a side view of the cup lid.

Fig. 4 is a cross-sectional view, taken along line 4-4 in Fig. 2.

Fig. 5 is a radial cross-sectional view taken through the cup rim.

Fig. 6 is a cross-sectional view of the spout, taken along line 6-6 in Fig. 2.

Fig. 7 is a cross-sectional view of a drinking hole in the spout.

Fig. 8 illustrates flow through the hole being resisted by surface tension.

Fig. 9 illustrates flow enabled by the application of suction to the spout.

Fig. 10 shows a drinking hole with a raised lip.

Fig. 11 shows a tapered hole.

Figs. 12A through 12E show various hole arrangements.

5 Fig. 13 is a cross-section through a mold for molding the upper end of the drinking spout and the holes.

Fig. 14 is a cross-sectional view through a spout of another embodiment, shown inverted.

Fig. 15 is a cross-sectional view of a drinking container with a removable baffle plate.

10 Fig. 16 is a perspective view of a baffle plate with a series of flow holes.

Fig. 17 is a top view of a first lid having a resiliently deformable region.

Fig. 17A is a cross-sectional view, taken along line 17A-17A of Fig. 17.

Fig. 18 is a top view of a second lid having a resiliently deformable region.

Fig. 18A is a cross-sectional view, taken along line 18A-18A of Fig. 18.

15 Fig. 19 is a top view of a third lid having a resiliently deformable region.

Fig. 19A is a cross-sectional view, taken along line 19A-19A of Fig. 19.

Fig. 20 is a top view of a fourth lid having a resiliently deformable region.

Fig. 20A is a cross-sectional view, taken along line 20A-20A of Fig. 20.

Fig. 21 is a perspective view of a cup body with opposing side indentations.

20 Fig. 21A is a bottom view of the cup body of Fig. 21.

Fig. 22 is a perspective view of a drinking cup with three side indentations.

Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

Referring first to Fig. 1, cup 10 consists essentially of a lid 12 and a cup body
25 14, each molded of a polypropylene to have a nominal wall thickness of between about 0.020 and 0.026 inch (about 0.5 millimeter). Lid 12 has a generally planar upper surface 16 about the perimeter of which a circular ridge 18 extends upward to form a groove on the underside of the lid to receive an upper rim of the cup body 14. A drinking spout 20, integrally molded with the rest of the lid, extends upward from
30 surface 16 to a distal end 22 shaped and sized to be comfortably received in a child's mouth for drinking. The upper end of the spout defines a blind recess 24 with a lower

surface defining a series of drinking holes discussed in more detail below. Besides the drinking holes in the spout recess, the rest of lid 12 forms an air-tight seal at the top of cup body 14. A tab 26 extends laterally from an edge of the lid opposite spout 20, for prying the lid off of the cup body.

5 Figs. 2 and 3 further illustrate features of lid 12, such that the vertical walls 28 bounding recess 24 taper slightly toward each other from an upper rim 30 to a lower recess floor 32. A series of open, fixed holes 34 are molded through floor 32 to form a means of hydraulic communication through the spout. In this illustrated embodiment, four holes 34 are shown. Other embodiments have two, three, or more
10 than four holes 34, as shown in later figures. Fig. 3 shows the circular perimeter groove 36 formed within ridge 18 on the underside of the lid.

As shown in the enlarged views of Figs. 4 and 5, the inner contour of groove 36 and outer contour of cup body rim 38 are selected to provide a slight snap fit of the lid onto the cup body, to provide a secure seal. The upper, inner surface 40 of ridge
15 18 of the lid and the upper, outer surface 44 of rim 38 of the cup body define semi-circular arcs of similar radii. These surfaces blend into tangential, vertical walls on the outboard side of the ridge and rim, but interlocking features are provided on the inboard side for an interference fit. On the lid (Fig. 4) this includes an outwardly projecting lip 46 that protrudes about 0.008 inch (0.2 millimeter) laterally into groove
20 36 from a vertical tangent to the inner edge of the upper, inner surface 40 of the groove. Similarly, on the cup body (Fig. 5), an inwardly projecting lip 48 protrudes about 0.008 inch (0.2 millimeter) toward the centerline of the cup body from a vertical tangent to the inner edge of the upper, outer surface 44 of the ridge. Thus, lips 46 and 48 produce a nominal maximum radial interference between rim 38 and groove 36 of
25 about 0.016 inch (0.4 millimeter) as the two pieces are engaged.

To further help to maintain the engagement of cup body and lid, in this particular embodiment groove 36 has three snap ridges 50 extending downwardly and inwardly at the outer edge of the groove and positioned to snap below the lower, distal edge 52 of cup rim 38 when the cup and lid are fully engaged. A portion of one snap
30 ridge 50 is visible in Fig. 4. The other snap ridges 50 are located at about 120 degree spacing about the lid perimeter, as shown in Fig. 2. Bending tab 26 upward helps to disengage the adjacent snap ridge 50 to remove the lid from the cup body.

The above-described snap connection between lid and body is readily producible by low-cost molding techniques and is therefore preferred for disposable versions of the drinking container. However, other methods of securing the lid to the body are envisioned. For example, a threaded connection may be provided about the cup rim. A third member (not shown) may alternatively be employed to secure the lid and body in sealed relation, either as a clip or a cup holder. Such a third member may be fashioned to be retained and used with several disposable cups, and may carry decorative graphics.

Referring now to Fig. 6, recess floor 32 has a membrane portion 54 of a slightly lower thickness than the rest of spout 20. It is through this membrane portion 54 that holes 34 extend. In this illustrated embodiment, semi-rigid spout wall 54 has a tightly controlled thickness of 0.029 inch. The structure of the upper portion of spout 20 is such that membrane 54 maintains its generally planar, as-molded form during normal use, even with significant pressure applied to the outer surfaces of the spout. Furthermore, placing membrane 54 at the bottom of recess 24, a distance "D" of at least 0.25 inch (6.5 millimeters), protects holes 34 from damage or any unintentionally sharp edges about the holes from contacting a child's lips.

Various configurations of holes 34, as illustrated by example in Figs. 7 through 11, provide different advantages for different applications.

Fig. 7, for example, shows a hole 34a that has an inner end 56, facing the cup side of the lid, with a sharp, square edge 58 about its circumference. On the other hand, its outer end 60, facing the spout recess, has a peripheral boundary 62 defined by a radius "R". Such a rounded exit edge may be formed, for example, by providing a radius about the base of a hole-molding pin pressed into a mold half forming the outer side of the membrane 54. Rounded edge 62 is thus likely to be free of any undesirable flash edges that could be reached by the tip of a child's tongue.

Fig. 8 illustrates the formation of a stable fluid bulge 64 extending into hole 34a from its inner end, under static pressure "P" applied by the weight of the liquid in the cup when the cup is inverted. A fluid membrane at the free surface of the bulge carries a surface tension that resists the rupture of the fluid membrane and the undesired leakage of the fluid through the hole. The level of pressure "P" that can be resisted by such surface tension will be a function of the relative surface energies of

both the fluid 66 and the lid material at the interface between the edge of the bulge 64 and membrane 54 (at 58, for instance). Resistance to leakage will also depend on fluid viscosity and lateral hole dimensions. We have found that, for many liquids commonly consumed by small children, such as fruit juices, water and whole milk, circular holes 34a of a diameter less than about 0.025 inch (0.64 millimeter) acceptably resist leakage under a quasi-static head of about two inches of these liquids with no suction applied to the spout. Preferably, the lid should not leak more than 3 drops of liquid over a 10 second interval, with two vertical inches of liquid over the holes and no suction applied, after being gently rotated to an inverted position at a rate of about 180 degrees per second.

On the other hand, when a sub-atmospheric pressure "S" is applied to the outer end of the same hole as shown in Fig. 9, with the lid inverted, the maximum surface tension capacity of the bulge free surface will be exceeded and flow will commence. Once flow begins, it is likely to continue even if suction is removed. Because of this tendency, and because this lid contains no deformable or movable sealing surface to stop the flow when suction is removed, we recommend sizing holes 34a small enough that such flow will rarely be initiated without applied suction. Of course, conditions will arise that can cause undesirable flow initiation in the absence of suction, such as a child purposefully hammering on a hard surface with the spout of an inverted cup, but for many commercial applications the economic advantage of our approach can outweigh such concerns.

Given that each drinking hole of the spout is small enough to avoid leakage under normal non-suction conditions, an acceptable flow rate under drinking conditions is obtained by providing a sufficient number of holes. Preferably the holes will form an aggregate flow area, perpendicular of flow, sufficient to obtain a flow rate of at least 1.3 grams of liquid over a 10 second interval, with the cup inverted, about two vertical inches of liquid over the holes, and a steady vacuum equivalent to 8 inches of mercury (0.27 Bar) applied to the spout after inversion. Preferably, the aggregate flow area will be at least 0.35 square millimeter. In one present arrangement shown in Fig. 12A, the spout has a total of three separate holes, each with a diameter of about 0.017 inch, forming an aggregate flow area of about 0.44 square millimeter. In some other arrangements, shown in Figs. 12B through 12E,

other numbers of holes 34 are arranged in various patterns. Figs. 12B and 12D, for example, show five and four holes 34, respectively, spaced apart along a line. Figs. 12C and 12E, on the other hand, show eight and ten holes 34, respectively, arranged in two lines, with the holes 34 of Fig. 12E in a staggered arrangement. The larger the
5 number of holes, the smaller each individual hole may be formed, to a practical limit, to decrease the propensity of leakage while maintaining an acceptable suction flow rate.

Referring back to Fig. 1, cup 10 is completely sealed with the exception of the drinking holes in spout 20. In other words, no vent allows air to flow into the cup as
10 the liquid is dispensed. An air tight seal is maintained between the groove of lid 12 and the rim of cup body 14, such that a slightly sub-atmospheric pressure will develop within the cup body during drinking. As soon as drinking stops and the cup is uprighted, however, air will enter the cup through the drinking holes to eliminate any pressure difference. We find this to be acceptable for many applications, as children
15 beyond nursing age do not typically maintain suction indefinitely while drinking. Furthermore, with disposable cup body 14 formed to have a particularly thin wall thickness, any substantial vacuum within the cup body will only tend to temporarily buckle the cup body wall if a child continues to build interior cup vacuum. In some other embodiments, the cup rim and lid groove are configured to allow some venting
20 to occur.

Cup 10 is molded of high clarity, polypropylene random copolymer resin, such as PRO-FAX SW-555M or MOPLIN RP348N, both available from Basell in Wilmington, Delaware or Basell N.V. in The Netherlands (www.basell.com). The resin preferably includes an impact strength-enhancing modifier or additive, and has a
25 particularly low weight and thickness that make the cup suitable for one-time use. For example, the seven-ounce (200 milliliter) cup body 14 shown in Fig. 1 has a nominal wall thickness of only about 0.025 inch (0.64 millimeter) with a thicker base of about 0.039 inch (1.0 millimeter) and weighs, together with the lid, only about 18.2 grams. A similar ten-ounce (300 milliliter) version weighs about 25.7 grams with the
30 lid. The material should meet FDA and other government standards for food-contact use. This particular material is also microwavable.

Furthermore, the design of the cup and lid make them individually nestable with other such cups and lids, such as for storing or retail packaging of multiple cups with multiple lids. Lid 14, however, may also be packaged and sold separately as a disposable lid for a non-disposable cup.

5 The presently preferred method of forming the drinking holes in lid spout 20 is to form the holes as the spout itself is molded, rather than performing a post-molding operation to form the holes. Alternatively, the drinking holes may be formed by piercing or laser cutting, although these processing steps tend to add cost and can, in some cases, produce more variability in hole properties than molding. Referring to
10 Fig. 13, we have found that these holes can be formed by a fixed pin 80 rigidly pressed into one of two opposing mold halves (e.g., into upper mold half 82) and either extending either into a corresponding hole 84 in the opposite mold half 86, as shown, or of a length selected to cause the distal end of the pin 80 to butt tightly up against the opposing mold surface to avoid molding flash that could seal off the
15 intended hole.

Many individual hole configurations are envisioned. Because the properties of the hole-defining surface where the edge of the stable liquid free surface forms (e.g., at the inner hole perimeter) are considered particularly important, we recommend maintaining close tolerances and strict quality controls, frequently replacing or
20 repairing wearing mold surfaces that form these areas. For some applications, a curved inner hole edge will be preferred, such as by inverting the configuration of Fig. 7. In some cases a very sharp entrance edge 68 will be desired, such as may be produced at the distal end of a conical extension 70 surrounding a hole 34b on the inner surface of membrane 54, as shown in Fig. 10. Such a conical extension 70 is
25 also useful for producing a longer axial hole length "L" than the nominal membrane thickness "T." If such an elongated hole is desired without a sharp entrance edge, the extension may be disposed on the other side of membrane 54. Extension 70 may be formed, for example, in a generous lead-in chamfer about a hole in a side of the mold forming the inner surface of membrane 54, that accepts a hole-forming pin rigidly
30 secured to and extending from an opposite mold half.

As shown in Fig. 11, frustoconical holes 34c may also be employed. In the embodiment shown, at its outer edge 72 hole 34c has a diameter D_1 of about 0.017

inch (0.43 millimeter), while at its inner end 74 it has a diameter D_2 of about 0.061 inch (1.5 millimeter). With a nominal membrane thickness of about 0.029 inch (0.74 millimeter), hole side wall 76 is sloped at an angle θ , with respect to the hole axis 77, of about 37 degrees. It is believed that the inward slope of hole wall 76 aids in the development and support of a stable fluid meniscus 78, as shown in dashed outline. Tapered hole 34c may be formed by an appropriately tapered mold pin that either extends a distance into a corresponding recess in the opposite molding surface, or, with proper quality controls and tight tolerances, butt up against a flat opposite mold surface without any receiving recess, without significant flash concerns.

Other features may be included to reduce the impact pressure of fluid at the drinking holes as the cup is rapidly inverted. For example, Fig. 14 shows a shallow dam wall 100 formed in the lid and extending inward about the drinking holes 34. As the cup is inverted to the shown position by a clockwise rotation, for example, fluid initially impinges on the inside surface of the spout in the direction shown by arrows A and B. Energy from some of the initial flow will be dissipated in the trough 102 formed within the rim 30 of the spout, while some secondary flow energy will be arrested and deflected by dam 100, such that the fluid reaching the inner openings of holes 34 is at a reduced flow energy and less likely to cause leakage.

A baffle may also be employed, such as is shown in Fig. 15. Cup 10A has a baffle plate 104 sandwiched between lid 12 and container 14. Baffle plate 104 need not provide any sealing about its periphery, where it engages the inner surface of container 14 along a shallow skirt 106. As lid 12 is snapped into place, its inner surface bears against the upper surface of plate 104, trapping it in place. Baffle plate 104 has an inwardly extending flap 108 underlying spout 20, around which fluid must flow to enter the spout.

Another baffle plate is shown in Fig. 16. Plate 104A consists essentially of a flat circular plate portion 110 with a shallow depending skirt 106 that tapers in outer diameter to match the inside taper of the container. A series of small flow holes 112 extend through the baffle plate and are spaced apart in a circular pattern so as to ensure that at least one hole 112 is positioned to provide hydraulic communication between the container and the spout without the need for rotational alignment. A

larger hole 114 through the center of the plate is large enough to receive a finger for pulling the plate from the container for cleaning.

The drink container may be provided with a shallow step about the perimeter of its inner wall at the opening, to provide a positive stop for the skirt 106 of the
5 baffle plate.

The drinking cup may be configured to take advantage of flow energy to help reduce leakage during cup inversions. By constructing the cup lid to resiliently deform outward under the weight of the contained fluid, a slight vacuum can be created above the fluid, in the enclosed bottom of the cup, thereby reducing the static
10 pressure at the drinking holes.

For example, a large area 116 of the planer region of the lid may be molded to have a very thin wall thickness, such as 0.017 inch (0.43 millimeter) or less, as shown in Figs. 17 and 17A. Outward deformation under pressure can be enhanced by forming at least this expanding region, or the entire lid, of a resilient material. A thin
15 sheet of thermoplastic elastomer (TPE) can be sealed over an aperture of the lid, for example, to form a sealed, expandable bladder.

The lid of Figs. 18 and 18A has a thinned, flexible region 116 extending about the entire spout 20, allowing the more rigid spout to deflect outward slightly under the weight of the cup contents.

The expandable region 116 of the cup lid may feature non-planer features, such as parallel accordion pleats 118 as shown in Figs. 19 and 19A, or nested undulations 120 as shown in Figs. 20 and 20A. In these latter two examples, localized joints or arches elastically flex as adjacent lid portions are pushed outward, increasing cup volume to generate a slight vacuum. It will be realized that for formation of the
25 optimum vacuum, the bottom of the container should remain relatively rigid as the vacuum forms. In each of the last four lid configurations shown, the location of the molding gate is shown as a small circular region 122 of nominal wall thickness.

Although the above containers 14 have been illustrated as of a generally tapered cylindrical shape, other shapes are possible and may enhance graspability by
30 small hands. For example, Figs. 21 and 21A show a fully nestable container 14A with opposing side indents 124 extending vertically along its lower extent to form a peanut profiled graspable portion. The upper region and rim of the cup are circular for

accepting any of the above-described lids. Fig. 22 shows a container 14V with three such indents 124 spaced at 120 degree intervals.

The cups shown in Figs. 21 and 22 can be sized to hold approximately seven fluid ounces, with enhanced graspability for younger children, and can be fashioned
5 of equal rim diameter to the 10 ounce cup 14 of Fig. 1 for older children.

Although illustrated with respect to a child's sippy cup, aspects of the invention are also applicable to other drinking containers, such as sports bottles and the like. However, particular advantage is obtained in the context of a disposable sippy cup.

10 A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. Accordingly, other embodiments are within the scope of the following claims.

15

WHAT IS CLAIMED IS:

1. A drinking container comprising
a main body (14) defining an interior cavity accessible through an opening at
an upper end of the main body; and
5 a removable lid (12) secured to the main body at its upper end to cover the
opening and enclose, together with the main body, the interior cavity to hold a liquid;
the lid having an extended drinking spout (20) sized to be received within a
human mouth and defining multiple unrestricted holes (34) providing open hydraulic
communication between exterior surfaces of the container and the interior cavity, for
10 dispensing liquid disposed proximate inner ends (56) of the holes in response to a
vacuum applied at outer ends (60) of the holes;
the holes each having a major lateral extent, perpendicular to a flow path along
the hole, of less than about 0.025 inch (0.64 millimeter), and forming an aggregate
flow path through the spout of an area of at least 0.35 square millimeter.

15 2. The drinking container of claim 1 wherein the holes (34) are of a size
selected to cause fresh water in the interior cavity to form a stable meniscus at the
holes under a static pressure head of 2.0 inches (51 millimeters) of fresh water, with
the container inverted and atmospheric pressure applied to the outer ends (60) of the
20 holes.

3. The drinking container of claim 1 or claim 2 wherein the holes (34)
have a size selected to permit less than 3 drops of leakage of fresh water from the
interior cavity through the holes over a 10 second interval under quasi-static
25 conditions with a static head of 2.0 inches (51 millimeters) of fresh water at the inner
ends (56) of the holes and no vacuum applied to the spout with the container inverted,
and to dispense an aggregate of at least 1.3 gram of fresh water from the spout over a
10 second interval with a static vacuum of 0.27 Bar below atmospheric pressure
applied at the outer ends (60) of the holes and a static head of 2.0 inches (51
30 millimeters) of fresh water at the inner ends of the holes with the container inverted.

4. The drinking container of any of the above claims wherein the holes (34) form an aggregate flow path through the spout (20) of an area of at least 0.42 square millimeter, preferably at least 0.50 square millimeter.

5 5. The drinking container of any of the above claims wherein the holes (34) are defined through a membrane (54) having a nominal thickness of between about 0.010 and 0.040 inch (0.25 and 1.0 millimeter) at the holes, preferably between about 0.015 and 0.030 inch (0.4 and 0.8 millimeter) at the holes.

10 6. The drinking container of claim 5 wherein the membrane (54) comprises a semi-rigid material.

7. The drinking container of any of the above claims wherein the holes (34) are defined through a dimensionally stable membrane (54) of the lid (12).

15 8. The drinking container of claim 7 wherein the membrane (54) is generally planar and perpendicular to a longitudinal axis of each hole (34).

20 9. The drinking container of claim 7 or claim 8 wherein the membrane (54) is recessed within the drinking spout (20).

10. The drinking container of claim 9 wherein the spout (20) forms an inwardly-extending dam wall (100) about the holes (34).

25 11. The drinking container of claim 9 or claim 10 wherein the spout (20) has a distal rim (30) defining therewithin a trough (102) for receiving fluid as the container is inverted.

30 12. The drinking container of any of claims 7 through 11 wherein the lid (12), including the membrane (54), is integrally and unitarily molded from a resin.

13. The drinking container of claim 12 wherein the lid (12) has a nominal molded thickness of less than about 0.035 inch (0.90 millimeter), preferably between about 0.020 and 0.026 inch (0.51 and 0.66 millimeter).

5 14. The drinking container of any of the above claims wherein the lid (12) has a main body portion defining a peripheral groove (36) sized to receive an upper rim (38) of the body (14).

10 15. The drinking container of claim 14 comprising a snap ridge (50) extending into the groove (36) at an outer edge thereof and positioned to snap under the rim (38) of the body (14) when the body and lid (12) are fully engaged.

16. The drinking container of claim 15 wherein the snap ridge (50) is discontinuous about a periphery of the lid (12).

15 17. The drinking container of any of the above claims wherein the lid (12) forms an air-tight seal with the main body (14) at the upper end of the main body.

20 18. The drinking container of any of the above claims wherein the major lateral extent of each hole (34) is less than about 0.020 inch (0.51 millimeter), preferably less than about 0.014 inch (0.36 millimeter).

19. The drinking container of any of the above claims wherein the drinking spout (20) defines at least four said holes (34).

25 20. The drinking container of claim 19 wherein each hole (34) has a diameter of less than about 0.012 inch (0.30 millimeter).

30 21. The drinking container of any of the above claims wherein the drinking spout (20) defines at least eight said holes (34).

22. The drinking container of any of the above claims wherein the holes (34) are defined by molded surfaces of the drinking spout (20).

23. The drinking container of any of the above claims wherein the holes (34) are flared at their inner ends (56).

24. The drinking container of claim 1 wherein the holes (34) are defined through a membrane (54) having a nominal thickness and forming a protruding lip (70) about each hole, such that the holes each have a length greater than the nominal thickness (T) of the membrane.

25. The drinking container of claim 24 wherein the lip (70) extends toward the interior cavity.

26. The drinking container of claim 24 wherein the lip (70) tapers to a distal edge (68).

27. The drinking container of claim 1 wherein both the main body (14) and the lid (12) are each formed of molded resin of a nominal wall thickness of less than about 0.035 inch (0.89 millimeter), preferably less than about 0.025 inch (0.64 millimeter).

28. The drinking container of any of the above claims having an empty weight less than about 30 grams, preferably less than about 20 grams.

29. The drinking container of any of the above claims wherein the lid (12) is formed of a resin containing polypropylene.

30. The drinking container of any of the above claims wherein lid material defining the holes (34) has a natural state surface energy of less than about 35 dynes per centimeter.

31. The drinking container of any of the above claims wherein the lid (12) has a solid surface across its extent, save for said holes (34).

32. The drinking container of claim 1 wherein the drinking spout (20) defines exactly three said holes (34), with each hole having a minimum diameter of between about 0.010 and 0.025 inch (0.25 and 0.64 millimeter). - -

33. The drinking container of any of the above claims further comprising a baffle plate (104) disposed between the interior cavity and the lid (12).

34. The drinking container of any of the above claims wherein the lid (12) has a resiliently deformable region (116) adapted to be displaced outward under pressure from container contents when the container is inverted to increase container volume, thereby reducing pressure within the interior cavity.

35. The drinking container of claim 34 wherein the deformable region (116) extends about the spout (20).

36. The drinking container of claim 34 wherein the deformable region (116) comprises flexible undulations (118,120).

37. The drinking container of any of the above claims wherein the main body (14a,14b) defines indentations (124) in side surfaces thereof, for enhanced graspability.

38. A method of forming a lid (12) for a drinking container (10), the method comprising

injecting moldable resin into a closed die cavity defining a body cavity portion shaped to mold a body portion with a peripheral groove sized to receive an upper rim of a drinking container and, contiguous with the body cavity portion, a spout cavity portion shaped to mold a drinking spout sized to be received within a human mouth,

with pins (80) extending across the body cavity portion, the pins each having a diameter of less than about 0.025 inch (0.64 millimeter);

solidifying the injected resin to form a lid shaped by the die cavity, the lid having a drinking spout with molded surfaces defining holes (34) corresponding to the pins (80);

opening the die cavity; and
removing the lid from the cavity.

39. The method of claim 38 wherein the resin comprises polypropylene.

40. The method of claim 38 or claim 39 wherein the resin has a natural state surface energy of less than about 35 dynes per centimeter.

41. The method of any of the above claims wherein each pin (80) has a diameter of less than about 0.020 inch (0.51 millimeter).

42. The method of any of the above claims wherein the die cavity has a series of at least three pins (80) extending therethrough, for forming a corresponding number of holes (34) in the lid (12).

43. The method of any of the above claims wherein the die cavity is unobstructed across its extent in all directions, save for said pins (80).

44. A drinking container comprising
a main body (14) defining an interior cavity accessible through an opening at an upper end of the main body, the body having a rim (38) about its opening, the rim having a domed upper surface; and

a removable lid (12) secured to the main body at its upper end to cover the opening and enclose, together with the main body, the interior cavity to hold a liquid, the lid defining a groove (36) about its edge sized to receive and snap over the rim of the main body and form a seal;

the lid having an extended drinking spout (20) sized to be received within a human mouth and defining at least one unrestricted hole (34) providing open hydraulic communication between exterior surfaces of the container and the interior cavity, for dispensing liquid disposed proximate an inner end (56) of the hole in response to a vacuum applied at an outer end (60) of the hole; wherein

the groove about the lid has an inner surface (40), and the rim of the main body has an outer surface (44), that each define semi-circular arcs of similar radii and have interlocking features on an inboard side, the interlocking features including

a first lip (46) projecting radially outward from the lid into the groove

and

a second lip (48) projecting radially inward from the outer surface of the rim of the main body to produce a nominal radial interference between the first and second lips as the lid and main body are engaged.

45. The drinking container of claim 45 wherein the first lip (46) protrudes about 0.008 inch (0.2 millimeter) laterally into the groove (36) from a vertical tangent to an inner edge of an upper, inner surface of the groove.

46. The drinking container of claim 44 or claim 45 wherein the second lip (48) protrudes about 0.008 inch (0.2 millimeter) toward a centerline of the main body (14) from a vertical tangent to an inner edge of the outer surface (44) of the rim.

47. The drinking container of any of claims 44 through 47 wherein the nominal radial interference between the first (46) and second (48) lips is about 0.016 inch (0.4 millimeter).

48. The drinking container of any of claims 44 through 47 wherein the lid (12) further comprises at least one snap ridge (50) extending downwardly and inwardly from an outer edge of the groove (36) and positioned to snap below a lower, distal edge (52) of the cup rim (38) when the main body (14) and lid (12) are fully engaged.

49. The drinking container of claim 48 wherein the lid (12) includes a bending tab (26) extending radially outward near one of the snap ridges (50).

5 50. The drinking container of any of claims 44 through 49 wherein both the lid (12) and main body (14) have nominal molded thicknesses of less than about 0.035 inch (0.90 millimeter), preferably between about 0.020 and 0.026 inch (0.51 and 0.66 millimeter).

10 51. The drinking container of any of claims 44 through 50 having an empty weight less than about 30 grams, preferably less than about 20 grams.

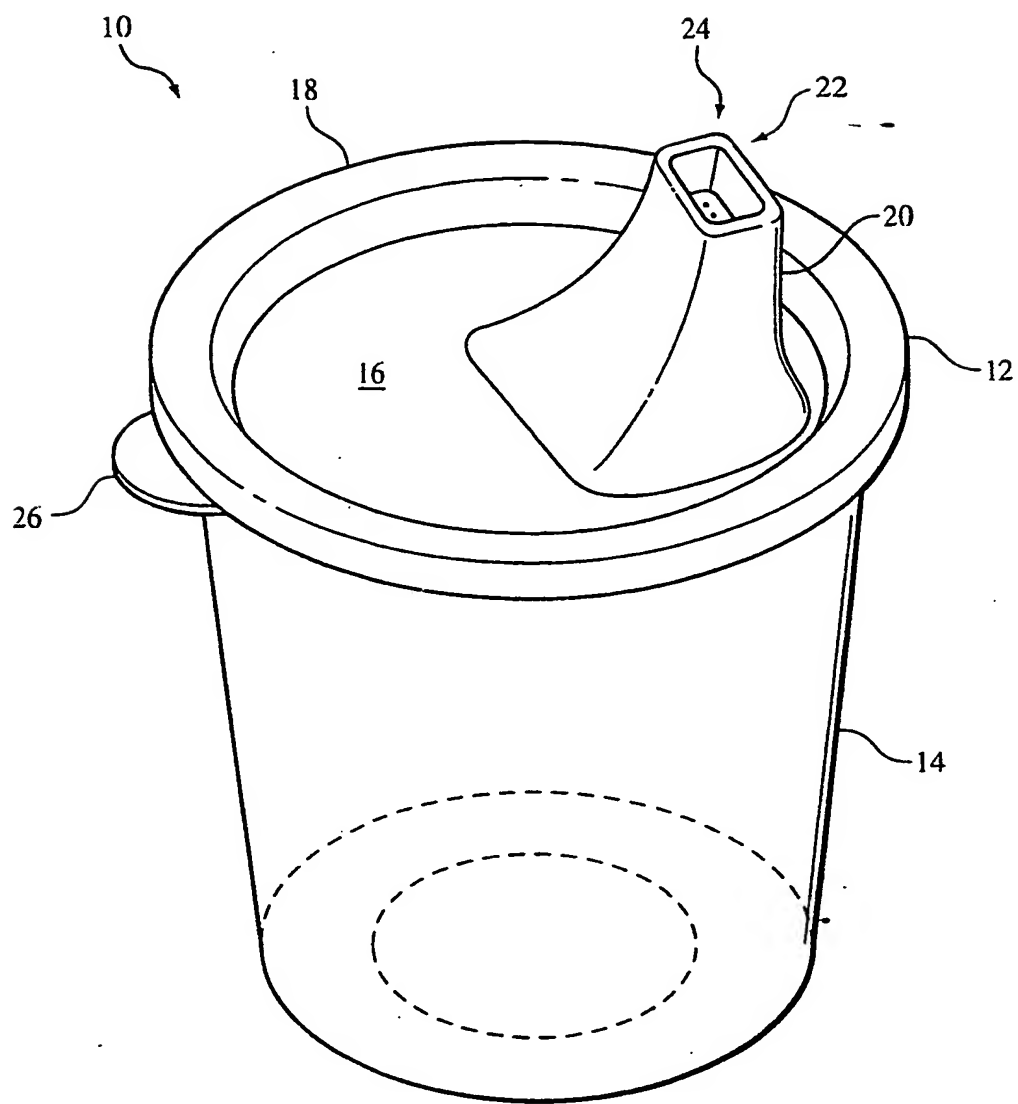


FIG. 1

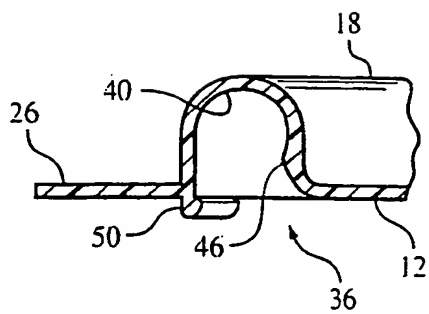


FIG. 4

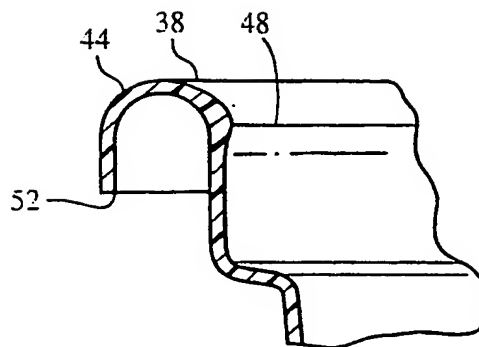


FIG. 5

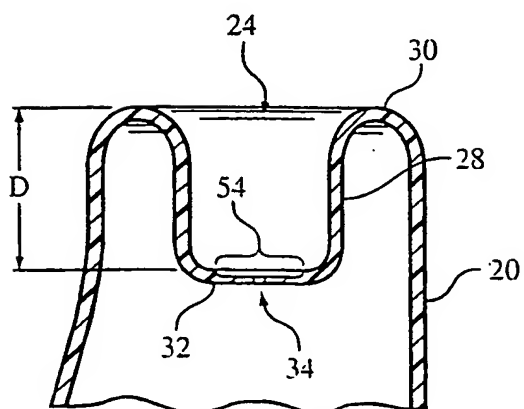


FIG. 6

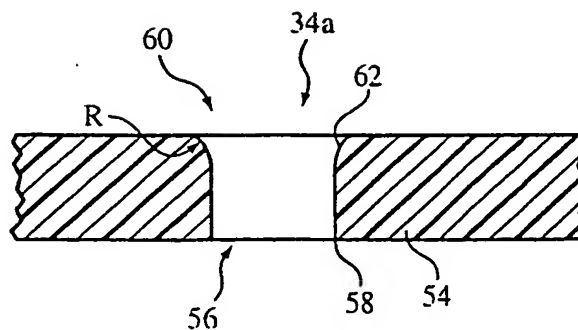


FIG. 7

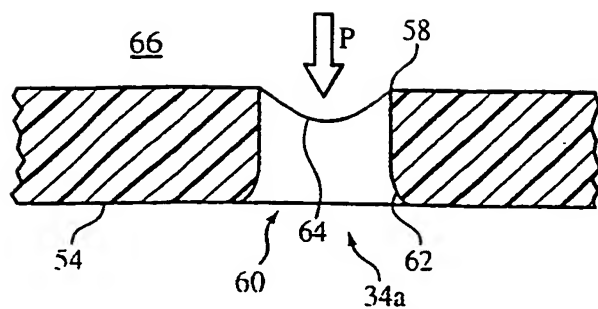


FIG. 8

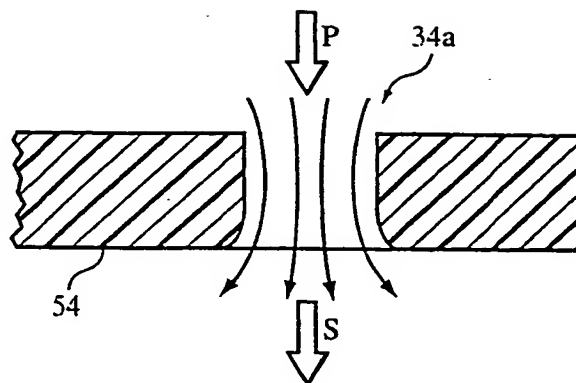


FIG. 9

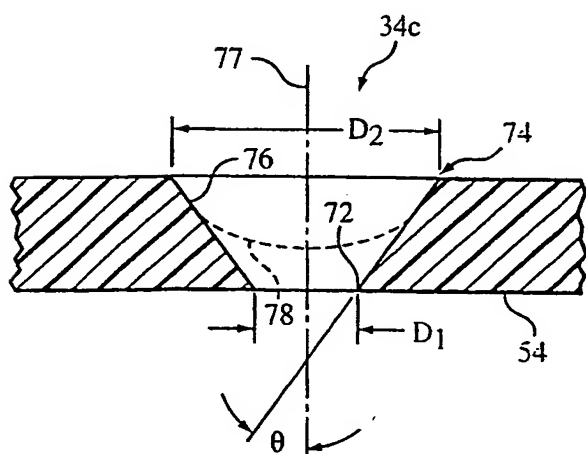


FIG. 11

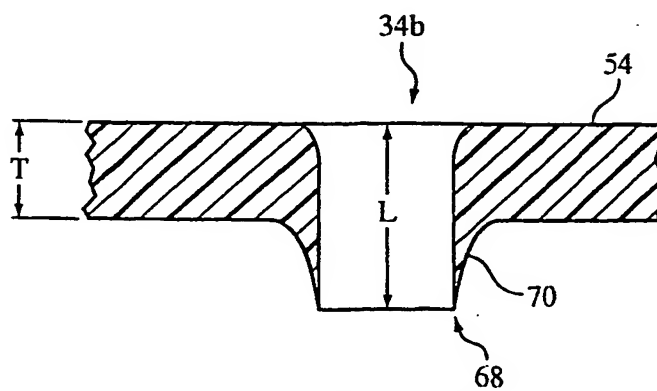


FIG. 10

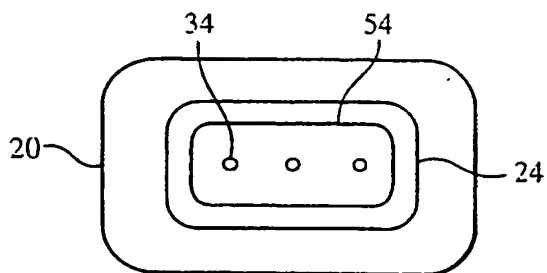


FIG. 12A

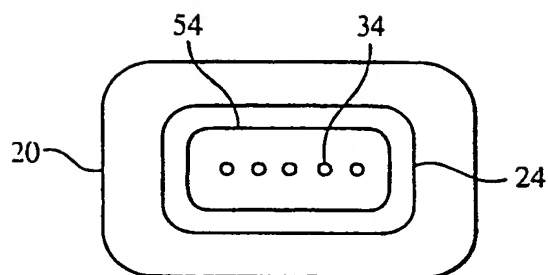


FIG. 12B

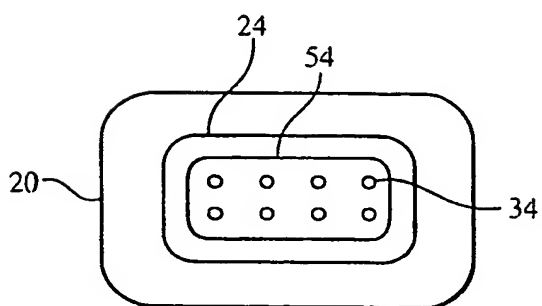


FIG. 12C

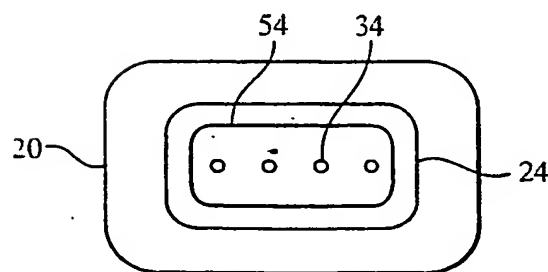


FIG. 12D

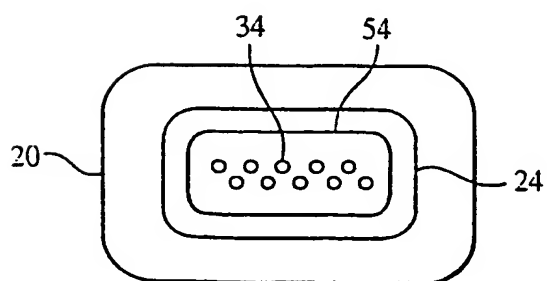


FIG. 12E

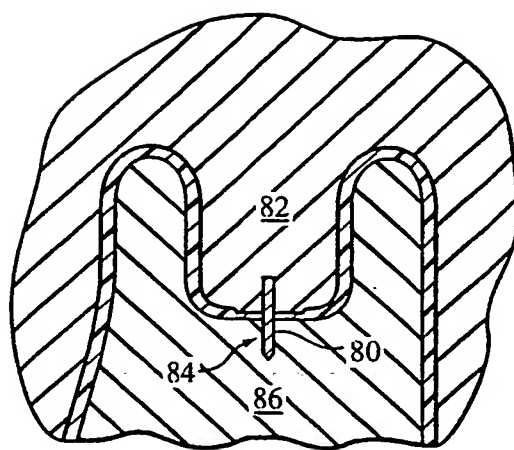


FIG. 13

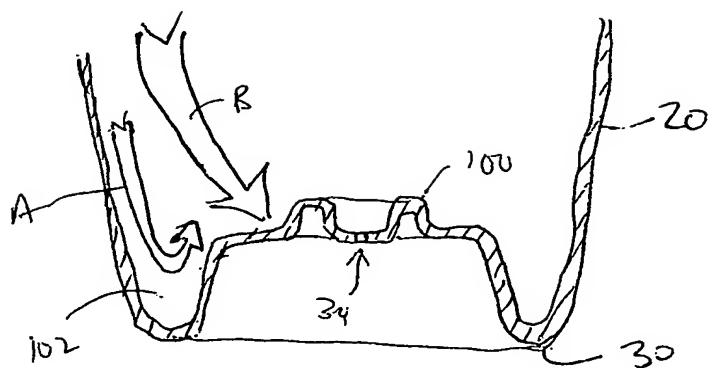


FIG. 14

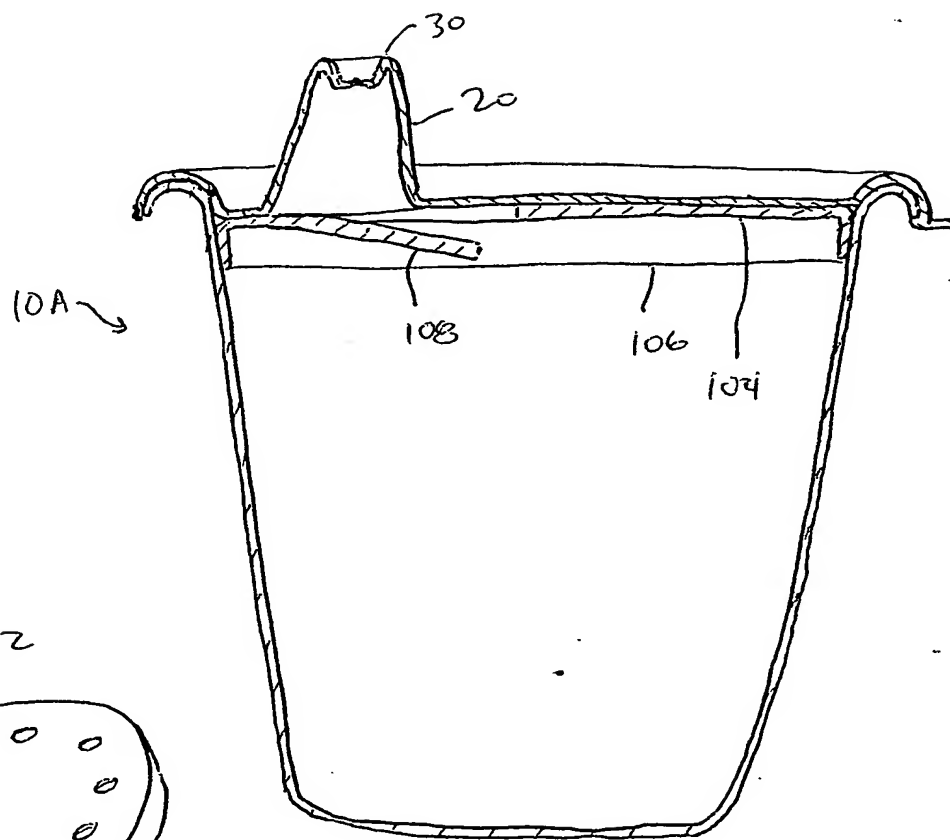


FIG. 15

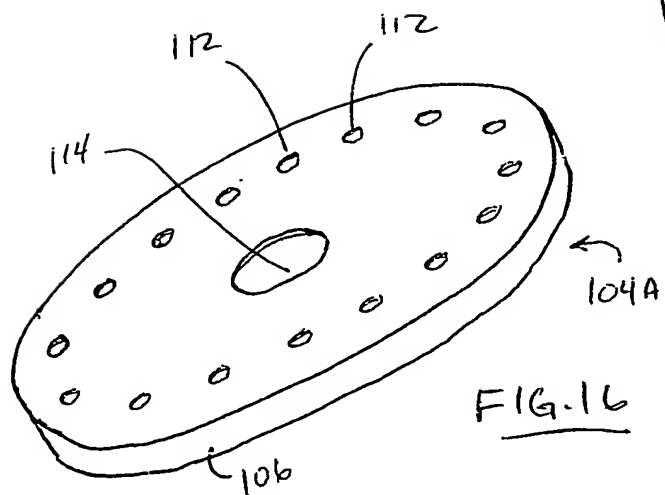
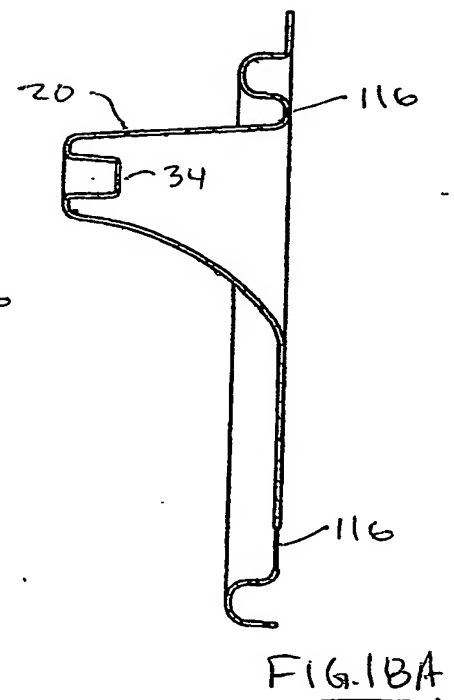
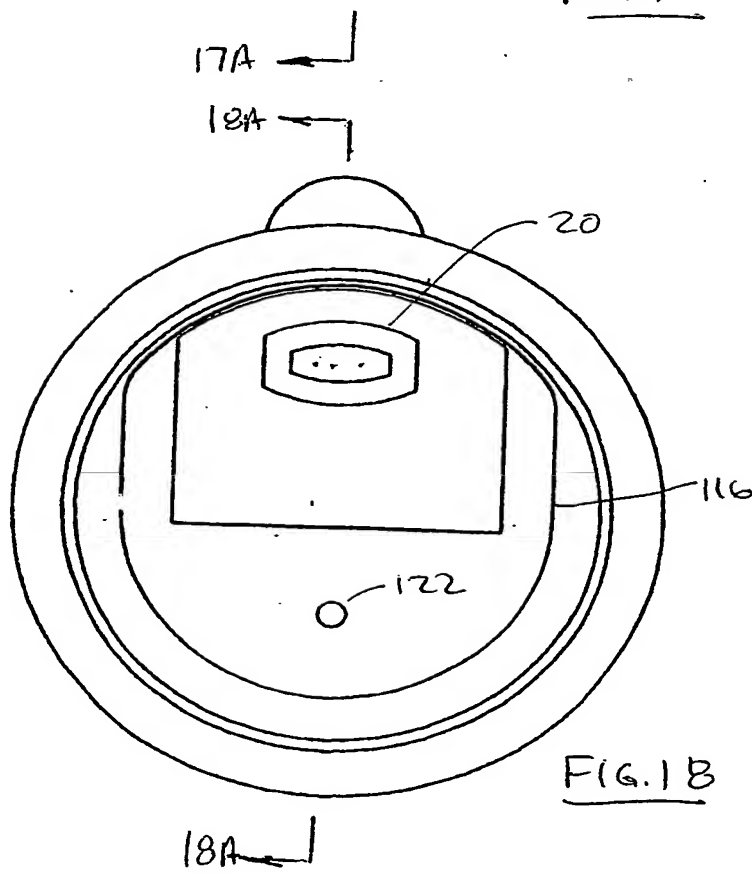
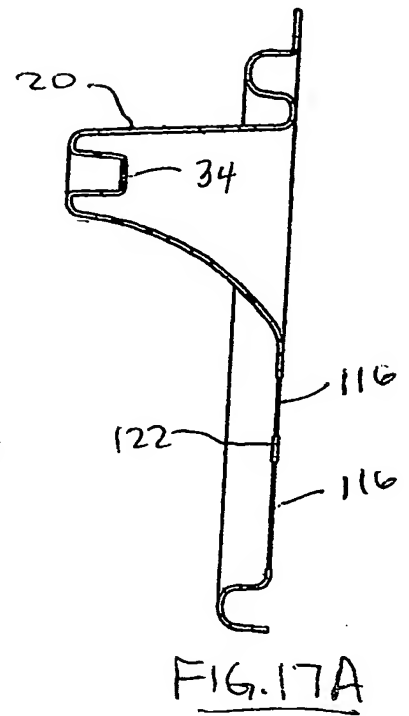
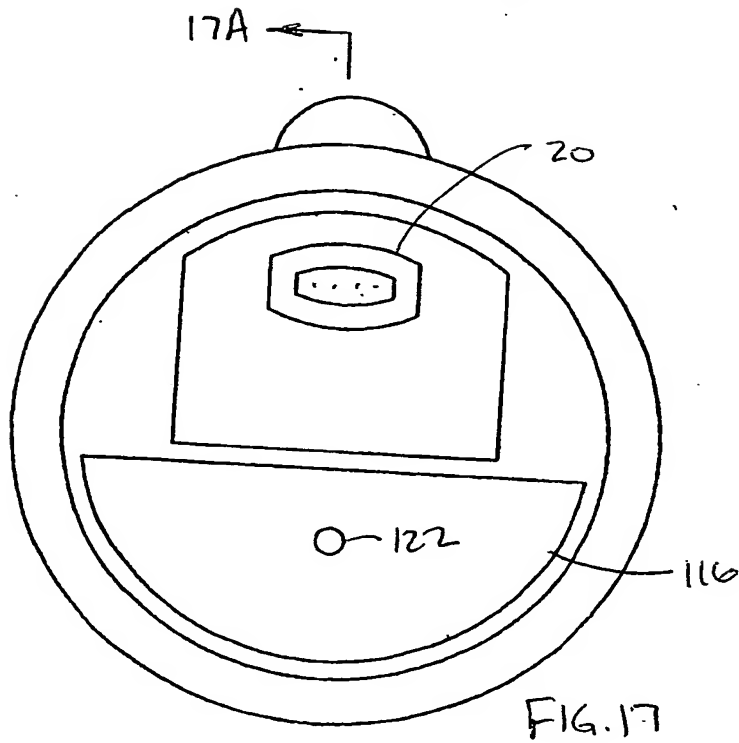
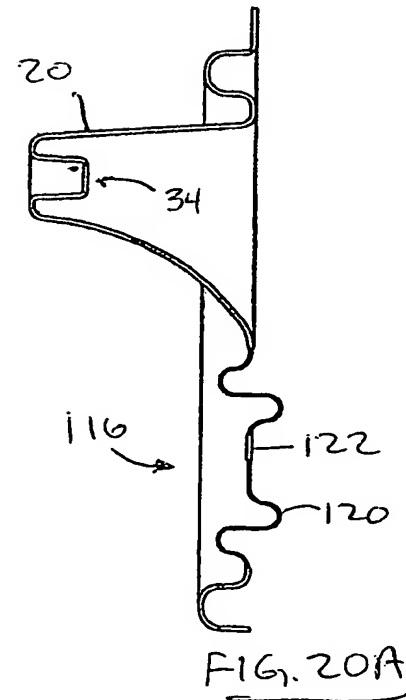
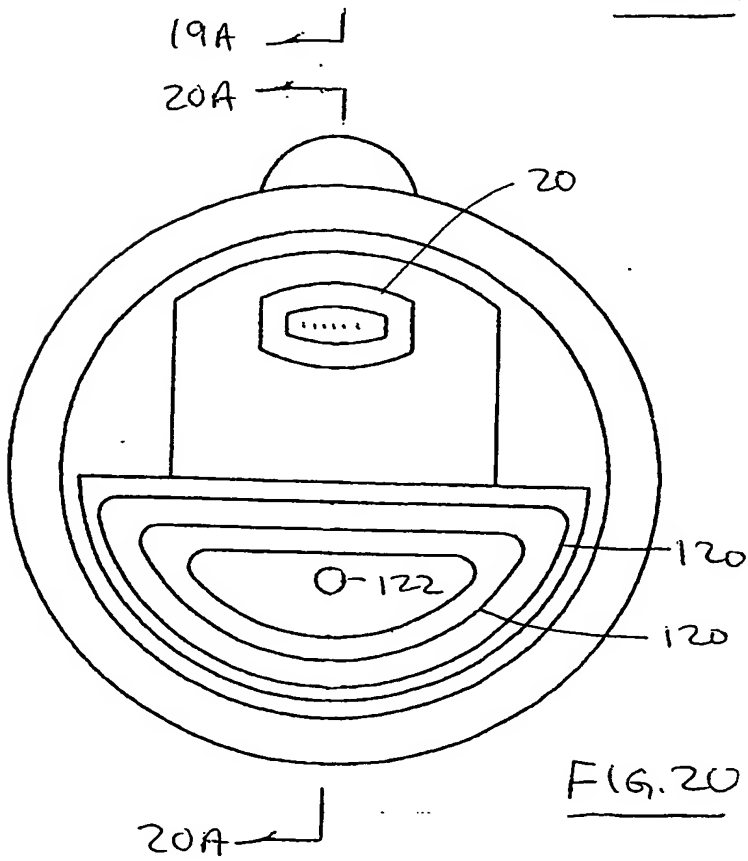
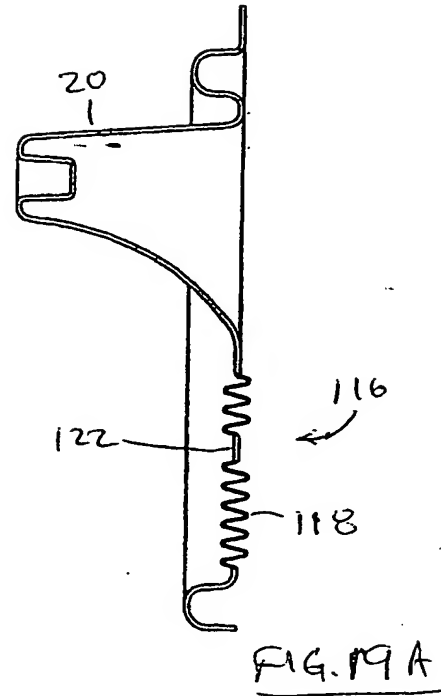
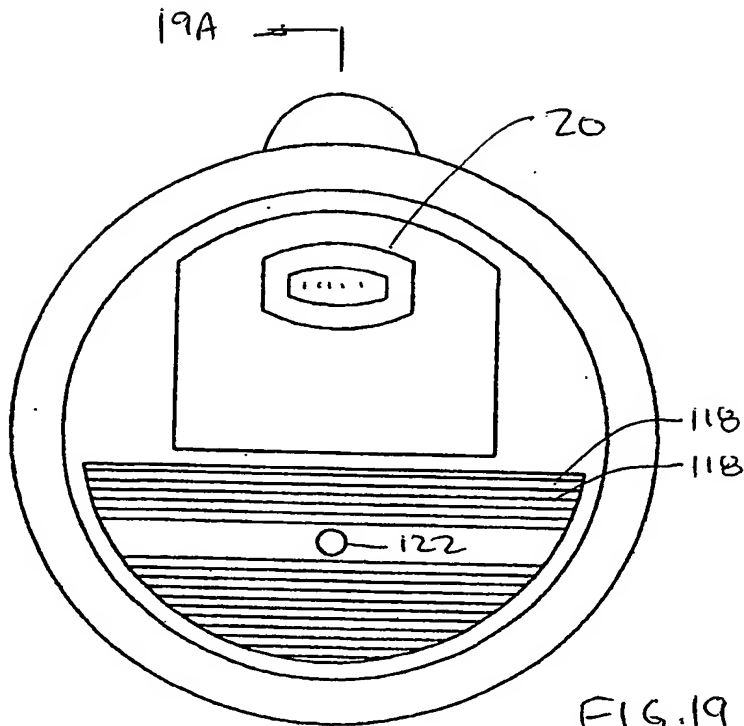


FIG. 16





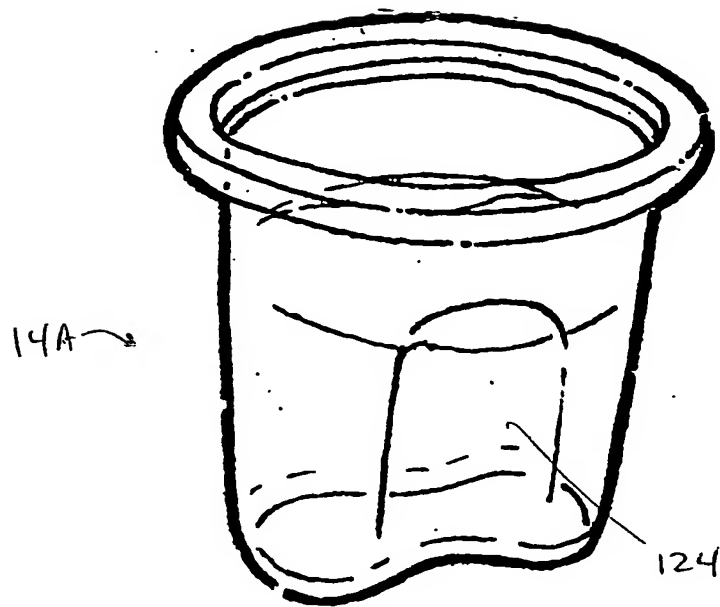


FIG. 21

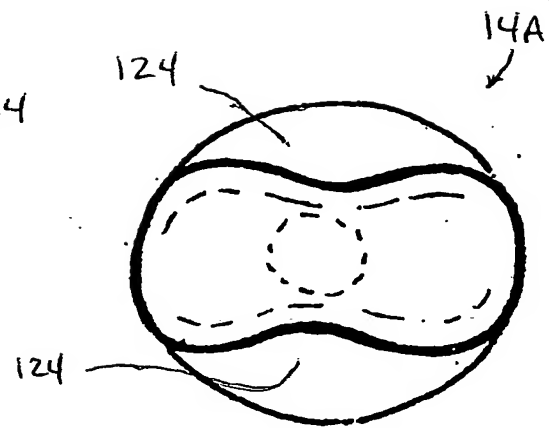


FIG. 21A

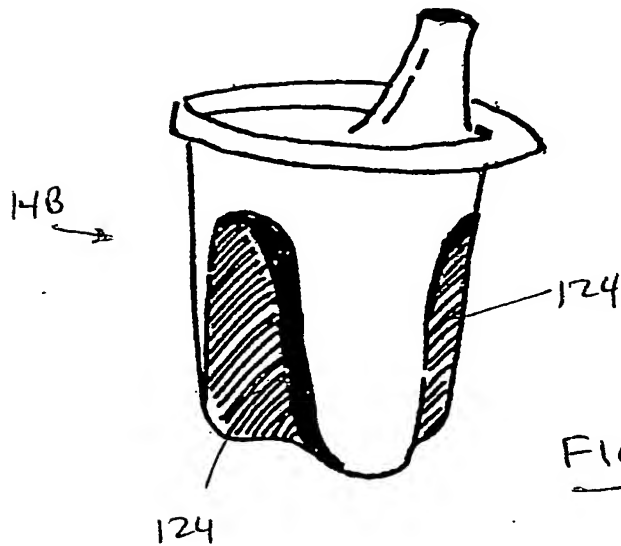


FIG. 22

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/31875

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A47G19/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47G B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 756 440 A (GARTNER WILLIAM J) 12 July 1988 (1988-07-12) column 4, line 3-13	1-4,6-9, 11,12, 14,17, 19,22, 30,31, 34-36
X	GB 2 285 621 A (BRAMMER RALPH JOHN ET AL) 19 July 1995 (1995-07-19) page 1, line 20-22; figure 4	1-3,6, 17-21
X	DE 299 09 423 U (STICHTING VAN DE GRONDEN & MUL) 11 November 1999 (1999-11-11) page 1, line 34 -page 3, line 30 -/--	1-4,17, 33

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 February 2003

Date of mailing of the international search report

24.02.03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Reichhardt, 0

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/31875

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 186 347 A (FREEMAN MARK A ET AL) 16 February 1993 (1993-02-16) column 2, line 40-45; figure 6 ---	6-9,19, 21
A	US 5 253 781 A (VAN MELLE ET AL) 19 October 1993 (1993-10-19) figure 2 ---	14,15
A	US 2 623 368 A (OLSEN EDWARD F) 30 December 1952 (1952-12-30) column 4, line 11-25; figures 10,11 ---	19,21
A	WO 97 17005 A (ANSA CO INC) 15 May 1997 (1997-05-15) figures 1,2 ---	37
A	US 5 540 350 A (LANSKY DARYL J) 30 July 1996 (1996-07-30) abstract ---	33
A	US 5 035 320 A (PLONE CLIFFORD) 30 July 1991 (1991-07-30) column 5, line 1-28; figures 17,18 ---	44,48
A	US 4 899 902 A (DEMARS ROBERT A) 13 February 1990 (1990-02-13) column 2, line 40 -column 3, line 47 ---	44,49
A	US 4 986 437 A (FARMER HERBERT B) 22 January 1991 (1991-01-22) column 2, line 23 -column 4, line 46 -----	44,48

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US. 02/31875

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-43

A drinking container comprising a lid with a drinking spout
defining multiple open holes sized to resist leakage by the
development of surface tension at the holes
A method of forming such lid for a drinking container

2. Claims: 44-51

A drinking container comprising interlocking features
between a lid and a container main body

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/31875

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4756440	A	12-07-1988	NONE
GB 2285621	A	19-07-1995	NONE
DE 29909423	U	11-11-1999	DE 29909423 U1 11-11-1999 AU 3424600 A 14-09-2000 WO 0049920 A2 31-08-2000
US 5186347	A	16-02-1993	NONE
US 5253781	A	19-10-1993	CA 2098066 A1 30-12-1993
US 2623368	A	30-12-1952	NONE
WO 9717005	A	15-05-1997	AT 183624 T 15-09-1999 AU 706704 B2 24-06-1999 AU 7671496 A 29-05-1997 BR 9611552 A 02-03-1999 CN 1201377 A 09-12-1998 DE 69603981 D1 30-09-1999 DE 69603981 T2 23-12-1999 EP 0871386 A1 21-10-1998 ES 2136439 T3 16-11-1999 GR 3031664 T3 29-02-2000 HK 1016043 A1 21-07-2000 IL 124156 A 06-12-2000 JP 2000504238 T 11-04-2000 NO 982005 A 04-05-1998 WO 9717005 A1 15-05-1997 ZA 9609420 A 02-06-1997
US 5540350	A	30-07-1996	US 6199711 B1 13-03-2001 US 5979689 A 09-11-1999
US 5035320	A	30-07-1991	US 5076425 A 31-12-1991 US 5147337 A 15-09-1992
US 4899902	A	13-02-1990	NONE
US 4986437	A	22-01-1991	NONE

THIS PAGE BLANK (USPTO)